


Transfer plan of the accumulated water in the turbine building of Unit 2

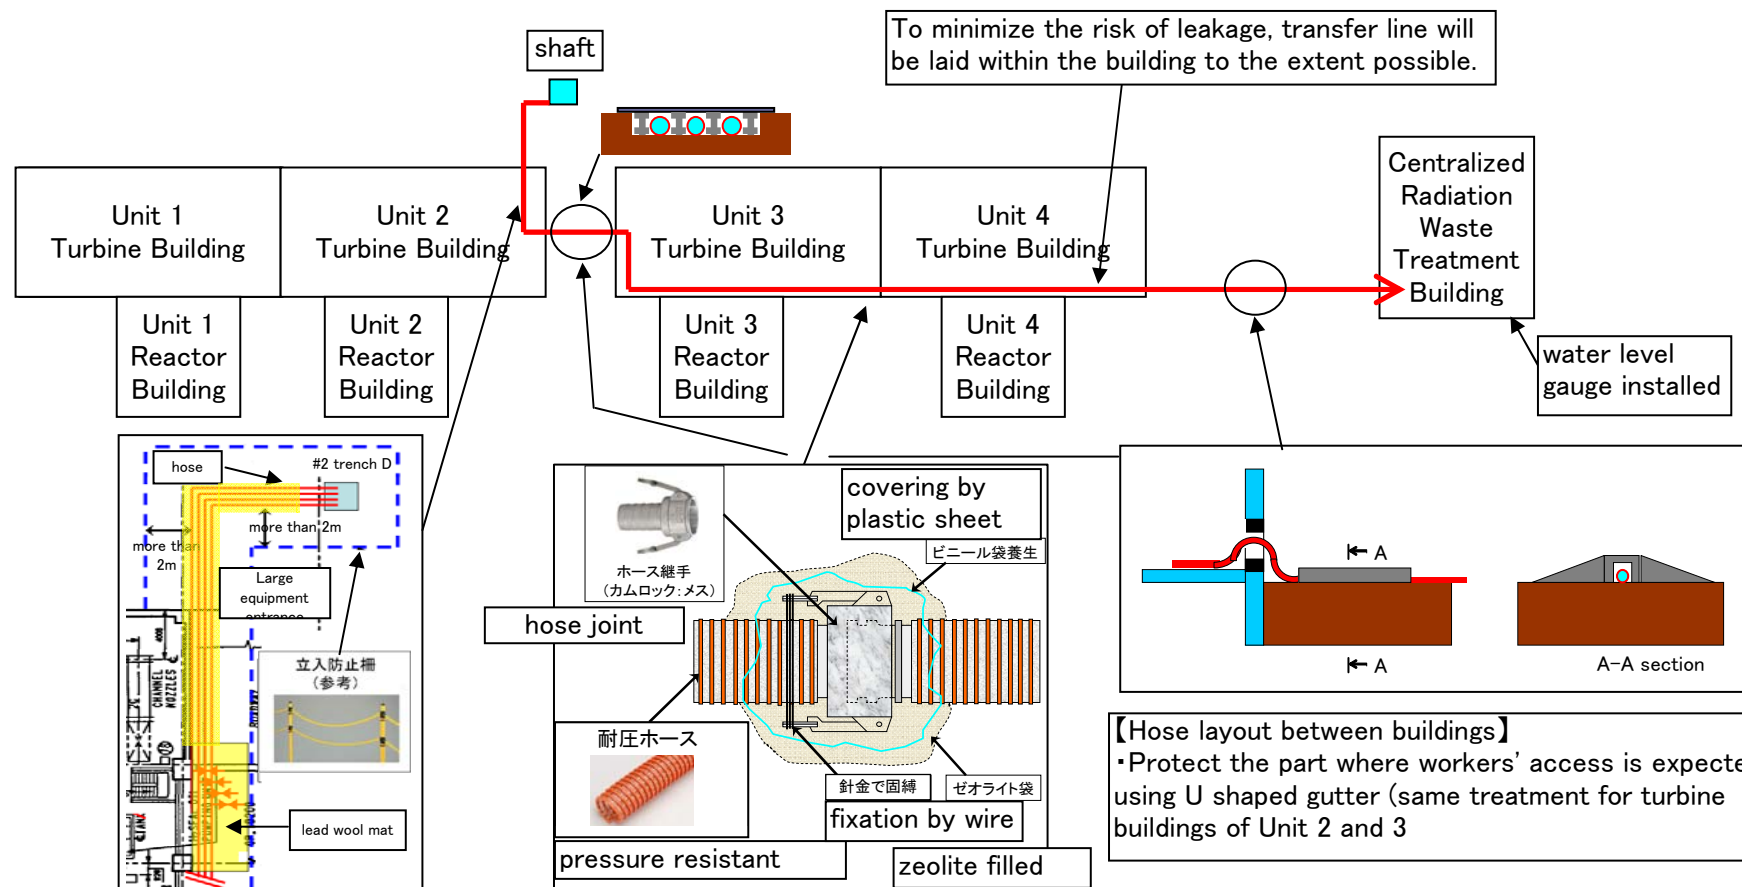

【radiation prevention】

- installation of fence
- installation of lead wool mat to the place where frequent traffic is expected

【leakage prevention】

- Strict check after the installation of hose
- Fixation of joint part by wire
- Utilize pressure and radiation resistant hose

【countermeasure in case of leakage】

- Surveillance of transferred water level
- Covering joint part + Zeolite

【Hose layout between buildings】

- Protect the part where workers' access is expected using U shaped gutter (same treatment for turbine buildings of Unit 2 and 3)