Situation of Storage and Treatment of Accumulated Water containing Highly Concentrated Radioactive Materials at Fukushima Daiichi Nuclear Power Station (596th Release)

April 10, 2023 Tokyo Electric Power Company Holdings, Inc.

1. Introduction

This document is to report the following matters in accordance with the instruction of "Installment of treatment facility and storing facility of water containing highly concentrated radioactive materials at Fukushima Daiichi Nuclear Power Station of the Tokyo Electric Power Company (Instruction) "(NISA No. 6, June 8, 2011), dated on June 9, 2011.

<Instruction>

TEPCO should report to NISA the situation of storing and treatment of the contaminated water in the Power Station and the future forecast based upon the current situation as soon as the treatment facility starts its operation. Also, subsequently, continued report has to be submitted to NISA once a week until the treatment of the accumulated water in the Central Radioactive Waste Treatment Facility is completed.

2. Situation of storing and treatment of accumulated water in the building (actual record)

Stored amounts in each unit building (Unit 1 to 4 (including condensers and trenches)) and stored and treated amounts, and other related data in the Accumulated Water Storing Facility as of April 6, 2023 are shown in the Attachment -1.

3. Forecast of storing and treatment

(1) Short term forecast

Water transfer in Unit 1 and 2 and Unit 3 and 4 is planned based on the stored amount in the Accumulated Water Storing Facilities and the operating situation of the radioactive material treatment equipment and the subdrain catchment facility. Water is transferred to the Process Main Building and/or High Temperature Incinerator Building as Accumulated Water Storing Facilities.

Treatment is implemented considering the state of storage and transfer of Accumulated Water Storing Facilities.

We assume stored amounts in each unit building (Unit 1 to 4 (including condenser and trench)), and stored and treated amounts, and other related data in the Accumulated Water Storing Facilities as of April 13, 2023 are shown in Attachment -2.

1

(2) Middle term forecast

Regarding accumulated water in Unit 1 and 2 buildings and Unit 3 and 4 buildings, from the viewpoint of reducing the risks of discharging to the ocean and leaking into the groundwater, it is necessary to keep enough capacity for the accumulated water in the building until its level reaches TP. 2,564 and to keep the accumulated water level lower than the groundwater level.

At the same time, in order to suppress the flow of groundwater into buildings and reduce the amount of accumulated water being generated, we are planning to transfer accumulated water from the Unit 1 to 3 reactor buildings, where injected cooling water is being circulated, in accordance with the status of the treatment of accumulated water containing highly concentrated radioactive materials and the amount of water being stored in accumulated water storage facilities, while ensuring a specific difference between the levels of accumulated water in buildings and the water levels of subdrains in the vicinity. At other buildings where the lowermost floors have been exposed, we are planning to transfer accumulated water to keep these floor surfaces exposed.

As for accumulated water of the Process Main Building and the High Temperature Incinerator Building, we are planning to treat the accumulated water considering the situation of construction of middle and low level waste water tanks, the operation factor of the radioactive material treatment instruments and duration for maintenance.

We forecast storing and treatment situations in the Accumulated Water Storing Facilities for the next 3 months, as shown in Attachment -3.

Stored amounts in the water storage equipment are forecasted to be unchanged in case transfer and treatment were implemented as scheduled without rain. However, it would be subject to change depending on the operation factor of the radioactive material treatment instruments and so on.

Also, the water treated at the radioactive material treatment equipment can be stored in the middle and low level waste water tanks.


END

Attachment-1

Change from last report [m³] Storage capacity [m³]

Storage volume [m3] *1,2

Storage and treatment of high level radioactive accumulated water (as of April 6, 2023)

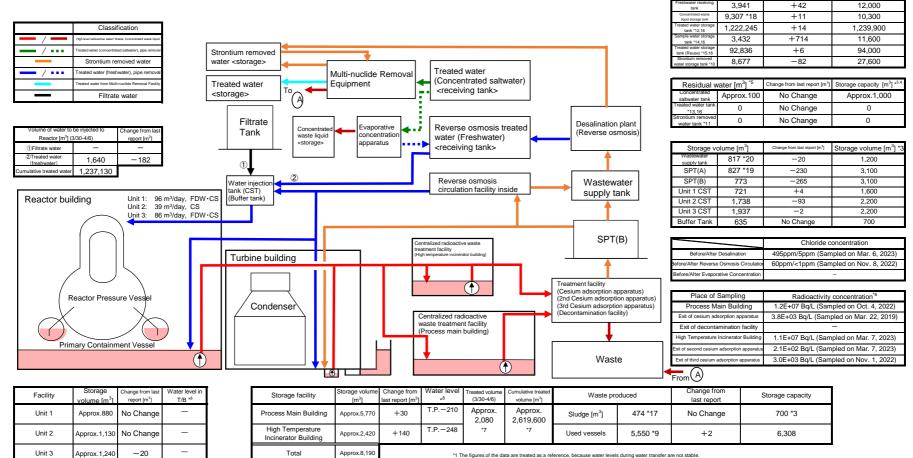

No Change Approx.10 Approx.3,260

[Main operations that have been conducted during the period from March 30, 2023 to April 6, 2023]

Unit 4

Total

necessary

conducted whenever necessary

*2 The figures of the storage volume do not include those of the following volumes that have accumulated from the bottom of the tanks to the height of so-called "down scale (DS)," where water gauges show 0%. Freshwater receiving tank (approx. 100m²), Concentrated washe liquid storage tank (approx. 100m²), Treated water storage tank (approx. 2,200m²) Treated water storage tank (reuse) (approx. 200m³), Strontium removed water storage tank (approx. 200m³).

"3 The figures of the data show the operational limits. "4 The figures of "Storage capacity" do not include those of the volumes that have accumulated from the bottom of the tanks to

the height of so-called "down scale (DS)," where water gauges show 0%. However, each tank has the capacity that accommodates more than the storage volume that accumulates up to the height of "DS."

5 The four of Residual water includes the one of the volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS); where water gauges show 06. The amount of the residual water of concentrated salivater is calculated based on that of the water treated through the ALPS and other facilities. To The data show there are those of CS-137.

*7 Total treated amount of Cesium adsorption apparatus and 2nd Cesium adsorption apparatus and 3rd Cesium adsorption apparatus.

Breakdown of the treated amount: Cesium adsorption apparatus (0 m³) 2nd Cesium adsorption apparatus (1,020 m³) 3rd Cesium adsorption apparatus (1,060 m³)

Breakdown of the cumulative treated amount: Cesium adsorption apparatus (394,720 m³

2nd Cesium adsorption apparatus (2,036,310 m³) 3rd Cesium adsorption apparatus (188,570 m³)

*8 The data of the water levels are as of 5 a.m., April 6

9 Breakdown of the used vessels: Cesium adsorption apparatus (779), 2nd Cesium adsorption apparatus (257), 3rd Cesium adsorption apparatus (17)

5 Section 10 Section 2000 Content in the part of the section of

11 Volume of the Strontum removed water (before ALPS treatment) remaining in the tange-type tanks 12 Volume of the ALPS treated water and "treated water to be re-purified" stored in the watedd-type tanks 13 Volume of the treated water to be re-purified" remaining in the flange-type tanks 14 Volume of the treated water to be re-purified" remaining in the flange-type tanks 14 Volume of the treated water to be re-purified remaining in the flange-type tanks 14 Volume of the treated water to be re-purified remaining in the ALPS sample tanks (flange-type), the additional ALPS temporary storage tanks (welded-type) and the high performance ALPS temporary storage tanks (welded-type) 15 Volume of the treated water to be re-purified remain the neueweided-type tanks which stored Strontium removed water (before ALPS treatment) before.

(These welded-type tanks have been reused from 2019)

16 The values of the SL state benefits as a state of the storage volume in each column of treated water, sample water, treated water (reuse) and treated water (residual). 17 Sum of studyed and supernataria water (as of a an. April 6) 18 Part of concernated water liquid is stored in the Storaium removed water storage tanks temporarily.

*20 Water transfer from treated water storage tanks to wastewater supply tanks was conducted whenever necessary

Operations of the Cesium Adsorption Apparatus have been suspended From April 3, operations of the 2nd Cesium Adsorption Apparatus were resumed; the availability factor is 12% (previous simulated: 20%).

From April 5, operations of the 2nd Cesium Adsorption Apparatus have been suspended.

From March 31, operations of the 3rd Cesium Adsorption Apparatus were resumed: the availability factor is 25% (previous simulated: 0%).

Water transfer from the Units 1-4 to the buildings (Units 1-4, Centralized radioactive waste treatment facilities) and to the treatment facilities was

- Due to other works, water transfer to the buildings (Units 1-4, Centralized radioactive waste treatment facilities) was conducted whenever

From April 3, operations of the 3rd Cesium Adsorption Apparatus have been suspended.

Attachment-2

[m³] *2,3

12,000


10,300

[m³] *2,3

0

3,100

Storage and treatment of high level radioactive accumulated water (as of April 13, 2023)

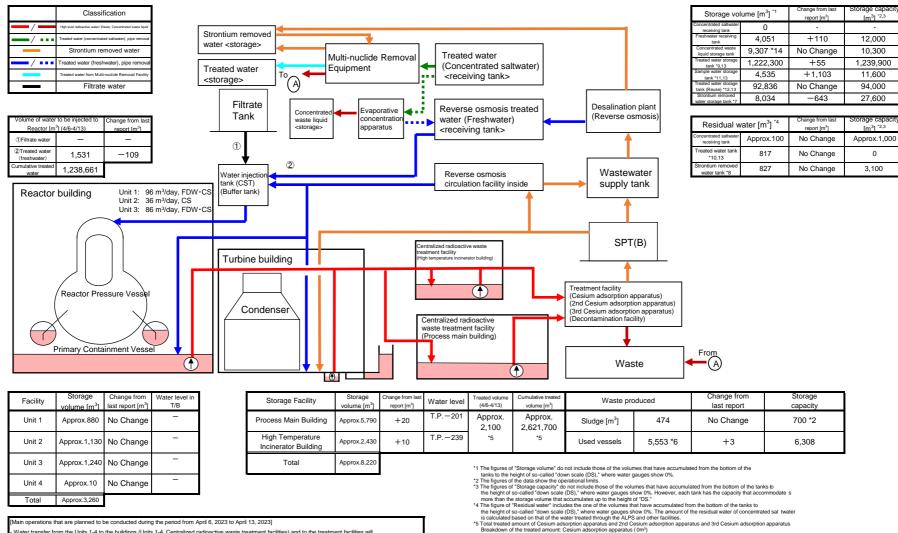

Water transfer from the Units 1-4 to the buildings (Units 1-4, Centralized radioactive waste treatment facilities) and to the treatment facilities will be conducted whenever necessary

Due to other works, water transfer to the buildings (Units 1-4, Centralized radioactive waste treatment facilities) will be conducted whenever

necessary

Operations of the Cesium Adsorption Apparatus will continue to be suspended.

Operations of the 2nd Cesium Adsorption Apparatus will be resumed (assumed availability factor: 25%)

Operations of the 2nd Cesium Adsorption Apparatus will be suspended.

Operations of the 3rd Cesium Adsorption Apparatus will continue to be suspended

2nd Cesium adsorption apparatus (2,100m3)

3rd Cesium adsorption apparatus (c, 100m) Breakdown of the cumulative treated amount: Cesium adsorption apparatus (394,720m³)

2nd Cesium adsorption apparatus (2,038,410m³) 3rd Cesium adsorption apparatus (188,570m³)

*6 Breakdown of the used vessels: Cesium adsorption apparatus (779) 2nd Cesium adsorption apparatus (257)


3rd Cesium adsorption apparatus (17) Others: Storage container (4, 164), Treated column (17), Used vessels (254), Filters and so forth (65) "7 Volume of the Strontium removed water (before ALPS treatment) stored in the welded-type tanks

*8 Volume of the Strontium removed water (before ALPS treatment) remaining in the flange-type tanks 9 Volume of the *ALPS treated water' and 'treated water to be re-purified' stored in the welded-type tanks *10 Volume of the 'treated water to be re-purified' remaining in the flange-type tanks *11 Volume of the "treated water to be re-purified" stored in the ALPS sample tanks (flange-type), the additional ALPS temporary storage tanks (welded-type)

and the high performance ALPS temporary storage tanks (welded -type) *12 Volume of the "treated water to be re-purified" stored in the reuse welded-type tanks which stored Strontium removed water (before ALPS treatment) before.

(These welded-type tanks have been reused from 2019.)

*13 The volume of the "ALPS treated water, etc." is the sum of the storage volume of each column of treated water, sample water, treated water (reuse) and treated water (residual). *14 Part of concentrated waste liquid is stored in the Strontium removed water storage tanks temporarily

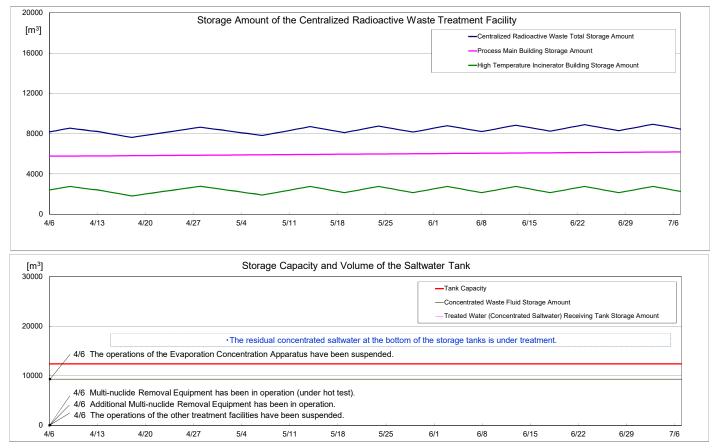

Note
- The amount of water treated through the treatment facilities is changed depending on the factors such as stored amount in the accumulated water storing facilities.