

Monitoring Plan Related to Water Shielding Wall Construction

- During the construction period regarding the water shielding wall, we will open and close the silt fence for the following works:
(Entrance & exit of vessels, Turning of vessels, Materials mobilization, Silt fence elongation)
- During the construction work, we will open and close the fence twice a week in average.
- In addition to regular monitoring of radioactive materials, we will also conduct monitoring at the harbor entrance as well as in front of the shallow draft quay when opening and closing the fence.

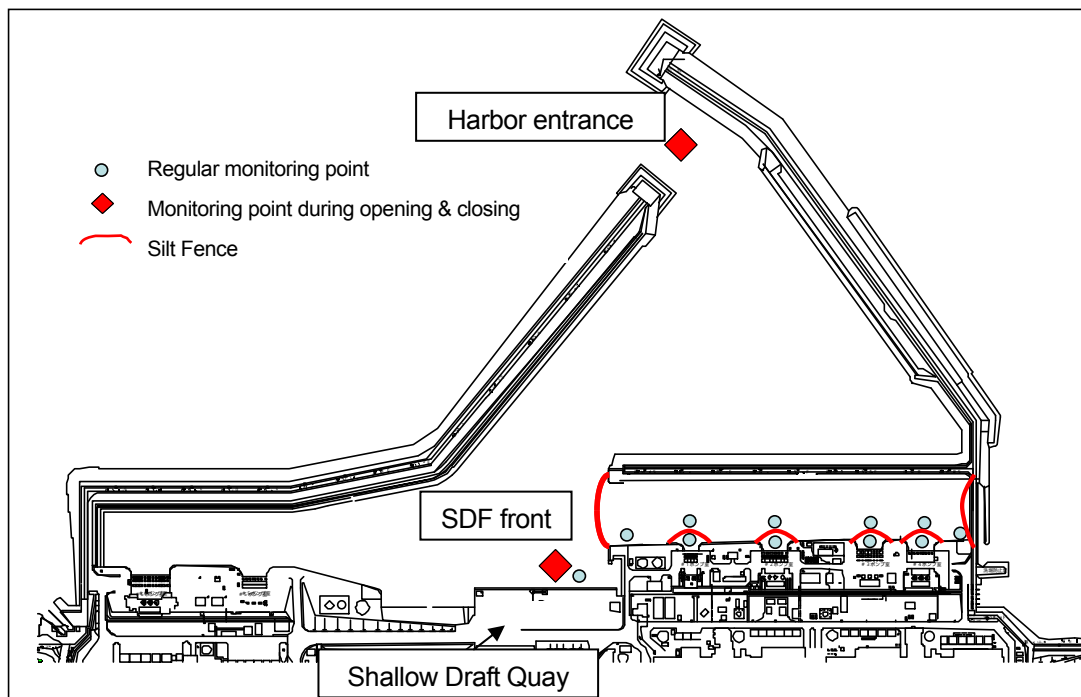


Figure 1: Harbor of Fukushima Daiichi Nuclear Power Station